

Specifications

- Tweeter: 1" Titanium Dome
- Woofers: 8" PP Cone Rubber Surround
- Impedance: 8Ω
- Sensitivity: 89±3dB
- Rated Freq. Resp.: 45Hz~20KHz
- MAX. Power RMS: 120 WATTS

5-Year Limited Warranty

Rave Technology products are warranted to be free from defects in workmanship and materials for a period of Five (5) years from the date of purchase without charge for parts or labor. This warranty does not apply to units that have been subject to misuse, abuse, neglect or improper installation, and does not apply to repairs or alterations made by unauthorized professional. This warranty specifically excludes responsibility for consequential damage. Retention of your original bill of sale is required to obtain service under the terms of this warranty. © 2020 Rave Technology. All rights reserved. All trademarks are the property of their respective owners. Specifications are subject to change without notice.

Rave Technology
4100 East Baldwin Road Holly,
Michigan, 48442 USA
Tel: 866-303-2629
contact@ravetechnology.com

RAVE
TECHNOLOGY

RS800 **ROCK SPEAKER**



Thank you for purchasing the RS800, one of the best sounding outdoor speakers available. We appreciate your purchase and are committed to providing the highest product quality and support. The RS800 All-Weather Rock speaker is a superb choice for any outdoor environments.

IMPORTANT INSTRUCTIONS AND CONSIDERATIONS

Please read and understand all instructions before beginning installation

PLACEMENT


- Place the Rock speakers close to your optimal listening area. Avoid placing them close to high pressure sprinklers as it may damage the speakers.
- Avoid placing the Rock speaker behind plants or other obstacles that may block the sound or alter the audio quality

RECOMMENDED AMPLIFIER POWER

- To get the best performance from your RS800 Rock speakers, we recommend powering them with an amplifier or receiver with a power rating between 60 to 80 Watts RMS output.

SPEAKER WIRE

- To connect your Rock speakers to your amplifier, we recommend high quality 14 to 16 gauge stranded speaker wire. Use direct burial speakers wire if running under ground without conduit.

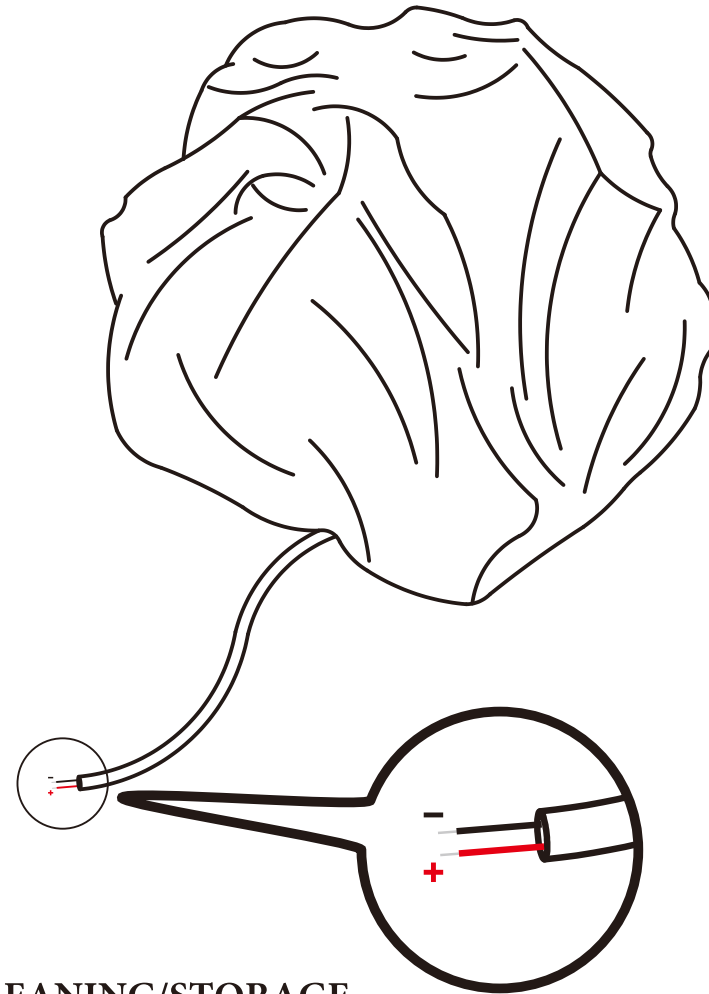

CLEANING/STORAGE

- Keep the Rock speakers clean to avoid insects nesting in the grill. Rinse them with low pressure water from a garden hose. Do not use chemicals on the Rock speakers including fertilizer, bug spray and deck sealants.
- The RS800 Rock speakers are tested to withstand temperatures from -13°F to $+158^{\circ}\text{F}$ (-25°C to 70°C).
- It is not recommended to use speakers when the temperature is below freezing. We recommended storing them inside during the winter if the temperature reaches below the rated temperature range.