

Specifications

- Tweeter: 1" Titanium Dome
- Woofer: 8" P.P Cone Rubber Edge
- Impedance: 8Ω
- Sensitivity: 89±3dB
- Rated Freq. Resp.: **45Hz~20KHz**
- MAX. Power Input: 120 WATTS
- Distortion: 3% MAX

5-Year Limited Warranty

Rave Technology products are warranted to be free from defects in workmanship and materials for a period of Five (5) years from the date of purchase without charge for parts or labor. This warranty does not apply to units that have been subject to misuse, abuse, neglect or improper installation, and does not apply to repairs or alterations made by unauthorized professional. This warranty specifically excludes responsibility for consequential damage. Retention of your original bill of sale is required to obtain service under the terms of this warranty. © 2020 Rave Technology. All rights reserved. All trademarks are the property of their respective owners. Specifications are subject to change without notice.

Rave Technology
4100 East Baldwin Road Holly,
Michigan, 48442 USA
Tel: 866-303-2629
contact@ravetechnology.com

RAVE
TECHNOLOGY

RS800 **ROCK SPEAKER**



Thank you for purchasing a great product from one of the best sounding speaker lines available today. We appreciate your purchase and are committed to providing the highest quality products possible.

The RS800 All-Weather Rock speaker models are a superb choice for any outdoor or moisture-prone areas. They have been designed with advanced technological components that allow for high performance and a lifetime of enjoyment.

IMPORTANT INSTRUCTIONS AND CONSIDERATIONS

- Carefully read and understand all instructions before beginning installation.

PLACEMENT


- Place the Rock speakers close to your optimal listening area. Avoid placing them close to high pressure sprinklers as it may damage the speakers.
- Avoid placing the Rock speaker behind plants or other obstacles that may block the sound or alter the audio quality

RECOMMENDED AMPLIFIER POWER

- To get the best performance from your Rock speakers, we recommend powering them with an amplifier or receiver with a power rating between 40 to 80 Watts RMS per input for ROCK-8.

SPEAKER WIRE

- To connect your Rock speakers to your amplifier, we recommend high quality 14 to 16 gauge stranded speaker wire. Use direct burial speakers wire if running them under ground without conduit.

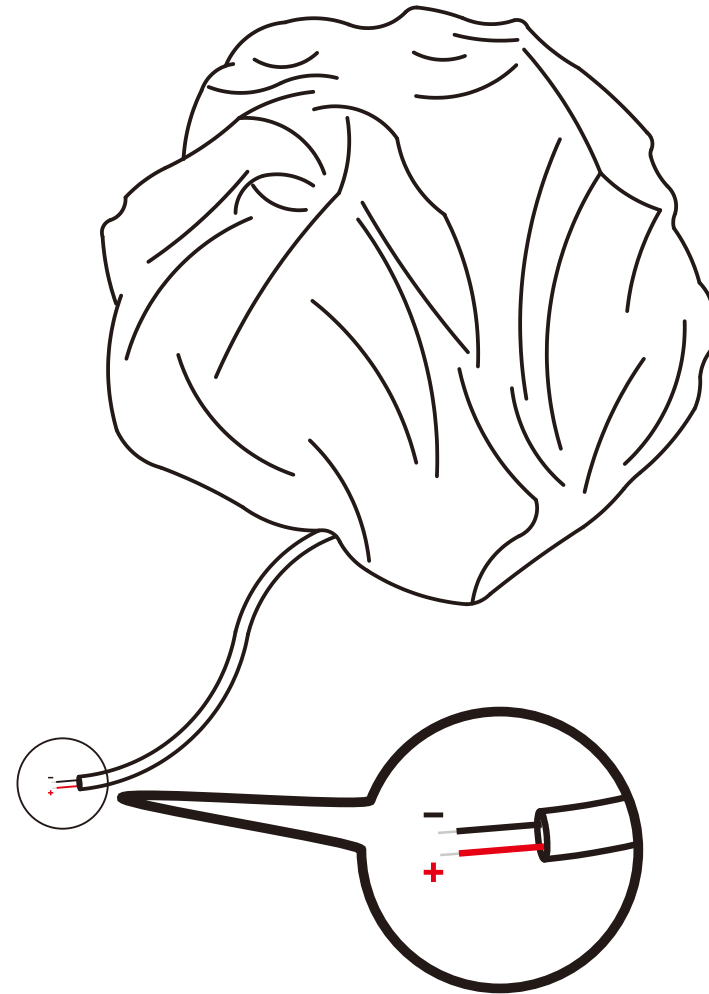

CLEANING

- Keep the Rock speakers clean to avoid insects nesting in the grill. Rinse them with low pressure water from a garden hose. Do not use chemicals on the Rock speakers including fertilizer, bug spray and deck sealants.

WEATHER AND STORAGE

- The Rock speakers are tested to withstand temperatures from -13°F to $+158^{\circ}\text{F}$ (-25°C to $+70^{\circ}\text{C}$). Do not play them when the temperature is below freezing. It is recommended to store them inside during the winter where the temperature reaches below the rated temperature range.