


ultracom NETWORKS

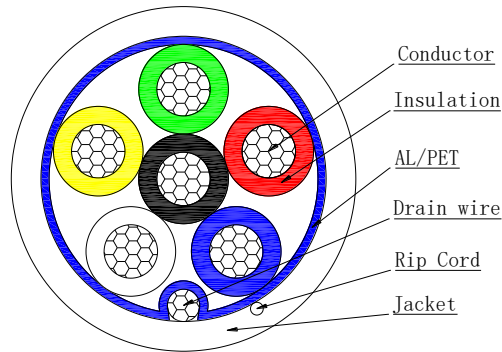

一、 Technical parameter

Type	6CX22AWG Alarm Cable CMP
Specification	UL444
Conductor	
Conductor material	BC
Conductor size	$7 \times 0.25 \pm 0.01$
Insulation	
Insulation material	PVC
Insulation diameter(mm)	1.15 ± 0.1
Average Thickness (mm)	0.20
Min Thickness (mm)	0.18
Color	Black,Red,Blue,White,Yellow,Green
Shield	
Shield material	AL/PET
Drain wire	
Drain wire material	TC
Drain wire size	$7 \times 0.2 \pm 0.01$
Rip Cord	
Rip Cord	Yes
Jacket	
Jacket material	PVC
Jacket Diameter(mm)	4.35 ± 0.2
Average Thickness (mm)	0.38
Min Thickness (mm)	0.30

Type	6CX22AWG Alarm Cable CMP
Specification	UL444
Color	White
Electrical & Physical Characteristics:	
Nom. Conductor DCR	≤55.4Ohm/km
Operational Temperature	-20°C~+75°C
Max. Operating Voltage	300V
Fire Test	CMP