

SC-RA-10 Series NVR

Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Up to 16/32/64-ch IP camera inputs
- Up to 1-ch@32 MP/2-ch@12 MP/16-ch@1080p decoding capacity
- 8 SATA interfaces for HDD connection
- HDD hot swapping with RAID 0/1/5/6/10



Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- Hot-swappable HDD with configurable RAID 0, RAID 1, RAID 5, RAID 6 and RAID 10 storage scheme
- 1 eSATA interface for HDD connection
- 16-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm

Network & Ethernet Access


- 2 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in

Specification

Model	SC-RA-10-32		SC-RA-10-64
Video and Audio			
	16-ch	32-ch	64-ch
IP video input	Up to 32 MP resolution *: After ultra HD resolution mode is enabled, the NVR supports up to 4-ch 32 MP/24 MP IP video inputs.		
Incoming bandwidth	256 Mbps	320 Mbps	320 Mbps
Outgoing bandwidth	256 Mbps		
Incoming bandwidth (RAID mode)	200 Mbps		
Outgoing bandwidth (RAID mode)	200 Mbps		
HDMI 1 output	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
HDMI 2 output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
VGA 1 output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
VGA 2 output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
Video output mode	HDMI 1 and VGA 1 provide simultaneous video output, and work as the main output; HDMI 2 and VGA 2 provide simultaneous video output, and work as the auxiliary output		
CVBS output (optional)	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
Audio output	2-ch, RCA (Linear, 1 KΩ)		
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)		
Decoding			
Decoding format	H.265+/H.265/H.264+/H.264/MPEG4		
Recording resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF *: After ultra HD resolution mode is enabled, the NVR supports up to 4-ch 32 MP/24 MP IP video inputs.		
Synchronous playback	16-ch		
Capability	1-ch@32 MP (30 fps)/2-ch@12 MP (20fps)/4-ch@8 MP (25fps)/8-ch@4 MP (30fps)/16-ch@1080p (30fps)		
Dual stream recording	Support		
Stream type	Video, Video & Audio		
Audio compression	G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM		
Network			
Remote connection	128		
Network protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS		
Network interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface		
Network mode	Net Fault-Tolerance, Multi-address		
RAID			


RAID Type	RAID0, RAID1, RAID5, RAID6, and RAID10 (at least 4 TB for each HDD)
Auxiliary interface	
Serial port	1 RS-485 (full-duplex), 1 RS-232, 1 keyboard
SATA	8 SATA interfaces supporting hot-plug
eSATA	1 eSATA interface
Capacity	Up to 10 TB capacity for each disk
Alarm in/out	16/4
USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
General	
Power supply	100 to 240 VAC, 50 to 60 Hz
Consumption (without HDD)	≤ 30 W
Fan	Speed self-adjustable
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Chassis	3U chassis
Dimension (W × D × H)	445 × 465 × 92 mm (17.5"× 18.3" × 3.6")
Weight (without HDD)	≤ 10 kg (22 lb)
Certification	
FCC	Part 15 Subpart B, ANSI C63.4-2014
CE	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4

Dimension

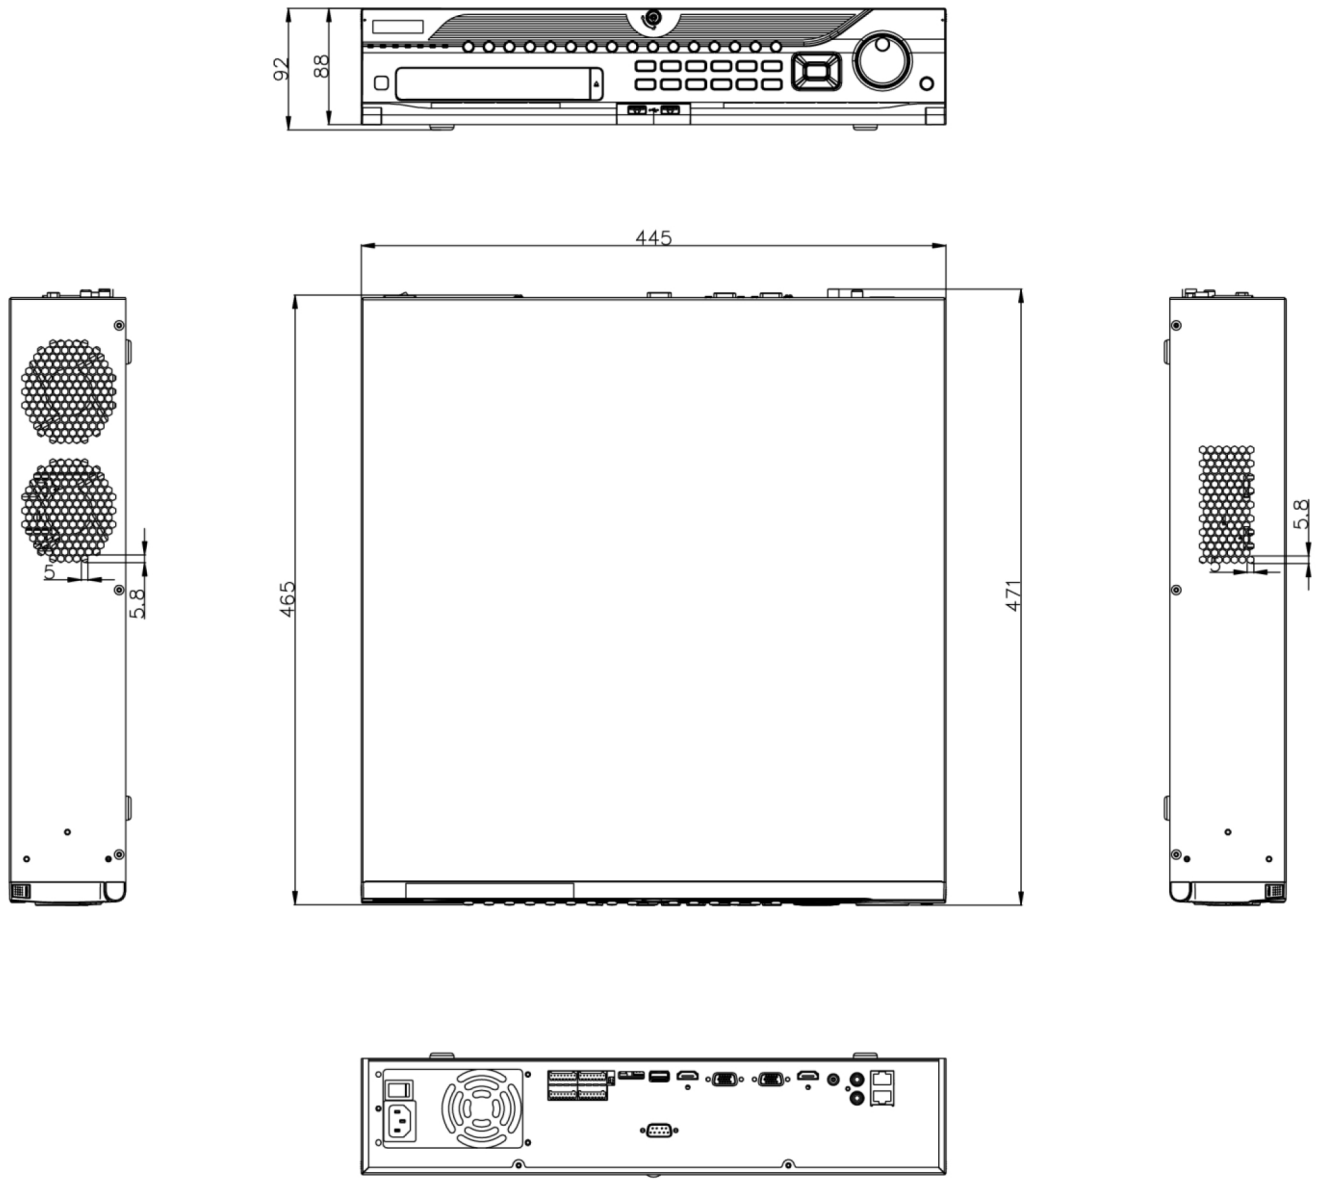

scale/1:1;Unit/mm

Physical Interface

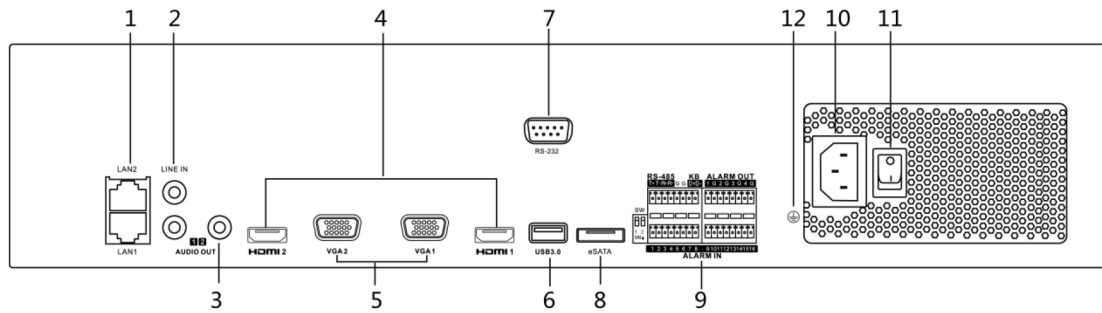

No.	Description	No.	Description
1	LAN Interfaces	7	RS-232 Serial Interface
2	LINE IN, RCA Connector	8	eSATA Interface
3	AUDIO OUT, RCA Connector	9	SW Dial Switch, RS-485 Serial Interface, Controller Port, ALARM IN, ALARM OUT
4	HDMI 1 and HDMI 2 Interfaces	10	100 to 240 VAC Power Supply
5	VGA 1 and VGA 2 Interfaces	11	Power Switch
6	USB 3.0 Interface	12	GND